



## GO FAST175 DC ULTRA CHARGE



- Potenza di uscita CC fino a 160kW
- 800 V con 200 A (fino a 175A a 920V)
- CCS, CHAdeMO e AC Standards
- Cavo CCS raffreddato passivo
- Interfaccia utente standard
- Identificazione utente RFID
- Dual SIM Modem 3G e 4G
- OCPP 1.5 o 1.6 (disponibile come JSON o SOAP)
- Per uso interno o esterno
- Modalità standalone o integrata in qualsiasi rete con qualsiasi sistema centrale
- Display a colori TFT da 6,4 "

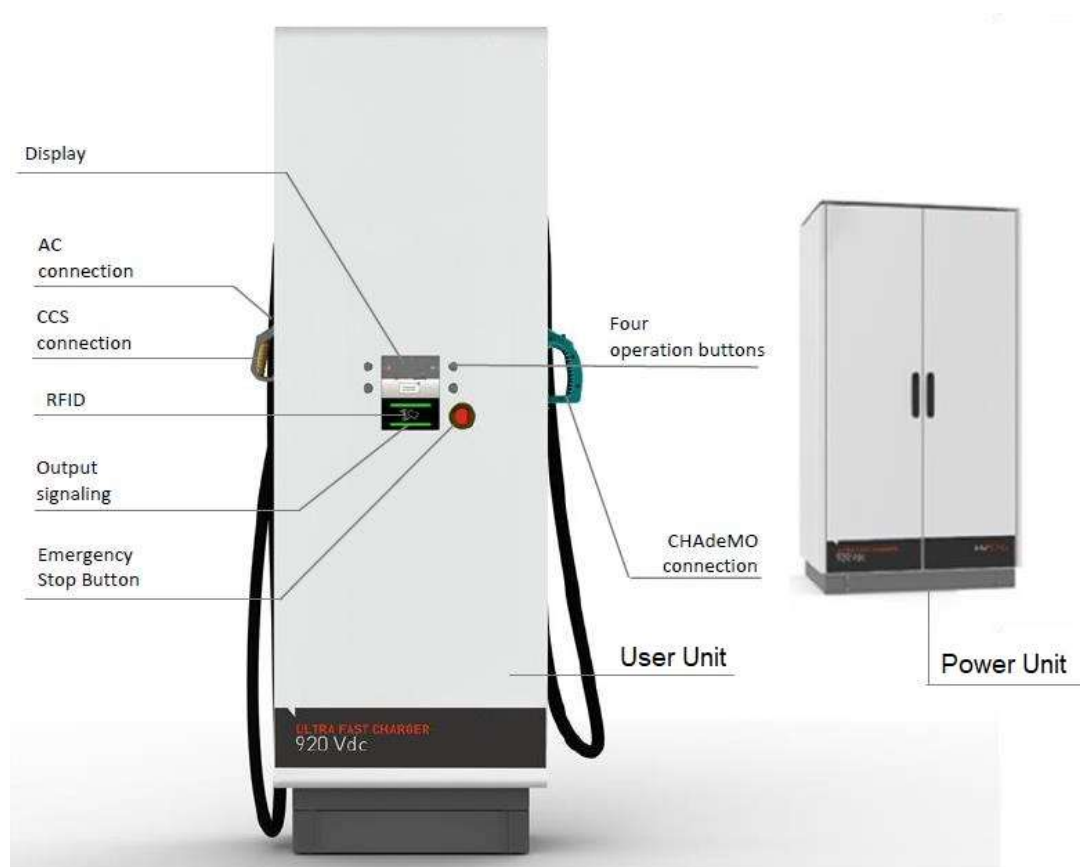



Technical Data		CE	ETL
Nominal Input	Phases/Lines	3 phases + neutral + PE	3 phases + PE
	Voltage	400 ± 10% V a.c.	480 ± 10% V a.c.
	Current	248 A @ 172 kVA	210 A @ 172 kVA
	Power	172kVA	
	Frequency	(50 ± 10%) Hz	(60 ± 10%) Hz
	Efficiency	> 95% @ full power	
	Power Factor	0,98	
	DC Output: CCS 200A	Voltage	920 V d.c.
Current		Up to 200 A d.c. @ 805 V d.c	
Nominal Power		161 kW	
Communications with EV		PLC	
Plug		CCS – Type 2	
DC Output: CHAdeMO	Voltage	500 V d.c.	
	Current	Up to 125 A d.c.	
	Nominal Power	62,5 kW	
	Communications with EV	JEVS G104 – CHAdeMO	
	Plug	JEVS G105 – CHAdeMO	
AC Output: AC43 (or AC22)	Voltage	(400 ± 10%) V a.c.	-
	Current	63 A a.c. (or 32 A a.c.)	-
	Nominal Power	43kVA or 22kVA	Not Available
	Plug (or Socket)	IEC62196 Type 2	-
Insulation	Input / Output / Ground	2000 V a.c.	
	Control Circuit / Ground	500 Vac	
Cabinet	Dimensions(WxDxH)	Power Cabinet: 1000 x 800 x 1800 mm Kiosk: 630 x 457 x 1922 mm	Power Cabinet: 39" x 32" x 74.5" in Kiosk: 24.8" x 18.0" x 75.7" in
	Weight	Power Cabinet: 1100 kg Kiosk: 140kg	Power Cabinet: 2425 lbs. Kiosk: 331 lbs
	Protection Degree	IP54, IK10	IP54, IK10, NEMA 3R
	Contactless card specification	Mifare Classic 1K&4K   Mifare DesFire EV1 (Others under request)	
HMI and Command Unit	Local interface	TFT Color display 6.4" Buttons	
	Communication Protocol (others under request)	Web Services over IP; Router 3G/4G (GSM, CDMA or LTE) OCPP; efacec; others	
	Emergency STOP	Yes	
	Temperature	-35° to +50°C	-31° to 122°F
Environment Conditions	Humidity	5% to 95%	
	Place of installation	Indoor / Outdoor	
	Altitude	Up to 1000m	
	Sound Noise	<55 dB in all directions	

## Output Characteristics

